



### 12Mbps



### Data Transfer Link


#### Data Transfer Link Specification

ItemNo.	UE-AA15LC-A	UE-AA15NC-A
Length	300cm	300cm
Color	black	black
Package	color box	color box



Root Port

#### Product Connecting

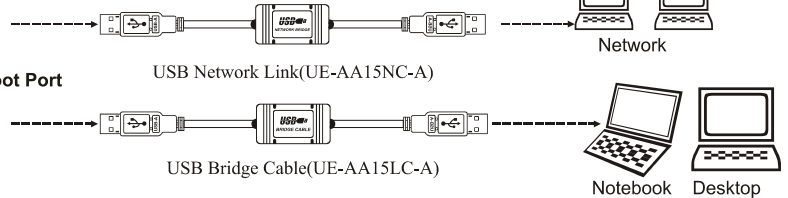

Remark:Picture in catalogue for reference only, color and specification according to real product.

### UE-AA15LC-A USB Bridge Cable

#### OVERVIEW

USB-to-USB Bridge Cable connectivity between any standard USB compliant host systems. Unlike previous file transfer methods like serial cable, parallel cable and IrDA, the USB Bridge Cable has a more advanced bus protocol and operation system that offers much higher bandwidth and easier user interface.

#### FEATURES

- Transfers files between two PCs with USB interface
- Full compliance with the USB Specification Version 1.1
- USB full-speed connection
- Double data buffer supporting two-way data transfer
- Low power consumption
- Supports suspend and resume power management
- Supports remote wake-up
- PnP drivers running under Win98/Me/2000/XP
- Support Mac OS8/OS9
- Bus powered from either USB port
- Suitable for mobile PC environment



UE-AA15LC-A  
(USB Bridge Cable)

USB<<<Data Transfer>>>USB

### UE-AA15NC-A USB Network Link

#### OVERVIEW

The USB Network Link Cable provides a quick and easy solution to construct a network via USB port instead of any Network Interface Card. It is suitable for small offices, home offices, mobile users, and network gamers. With the GeneLink/Net USB Network Link, users can share files, printers, peripheral equipment, and more...

#### FEATURES

- USB host to host communication
- Standard Windows Explorer user interface
- Maximum Data transfer rate: Over 7 Mbps.
- Construct USB Network up to 17 PCs
- Support TCP/IP, NetBEUI, IPX/SPX protocols
- Full NDIS driver implementation
- Single cable solution for network communication
- No external power needed
- USB full speed connection
- PnP for easy use ,Hot pluggable.
- Support power management
- Suitable for SOHO and mobile network environment.

Compliant with USB specification version 1.1



UE-AA15NC-A  
(USB Network Link)

USB<<<Network Share>>>USB





**Connect Product Comparison**

	Serial	Parallel	Ethernet	PCMCIA	UE-AA15LC-A	UE-AA15NC-A
Max Rate	115.2K	1.2m	10/100M	10M	12M	12M
Transferring Stablity	Low	Low	Good	Good	Good	Good
Product Volumn	Small	Small	Big	Small	Small	Small
Popularity	Good	Good	Good	Low	Good	Good
Occupying Socket	No	No	PCI or ISA	PCMCIA	No	No
Occupying IO	No	No	Yes	Yes	No	No
Other Hardware Support	No	No	Need	Need	No	No
Power Management	No	No	No	Yes	Yes	Yes
Data Transfer	Yes	Yes	Yes	Yes	Yes	Yes
Share Device	No	No	Share	Share	No	Share
Connectadle To Network	No	No	Yes	Yes	No	Yes
Support Network Protocols	No	No	Support	Support	No	Support
Support Internat	No	No	Support	Support	No	Support
Support Network Game	No	No	Support	Support	No	Support
Support PnP	No	No	Support	Support	Support	Support
Support Hot Pluggable	No	No	No	Support	Support	Support
Price	Low	Low	Med	High	Med	Med





## 12Mbps



数据线产品规格表

型号	UE-AA15LC-A	UE-AA15NC-A
长度	300cm	300cm
颜色	黑	黑
包装	彩盒	彩盒

注：所示图片供参考，颜色和规格以实际产品为准。

### UE-AA15LC-A USB Bridge Cable(USB 双机桥接线)

采用 USB Bridge Cable 可以通过标准的 USB 接口在两台主机间传送数据。同以往传统的串行并行、红外线接口相比，它可以提供更高的传输速度和更容易使用的用户界面。


- 通过 USB 接口在两台电脑之间传送文件(通过 GeneLink 传输软件)
- 完全兼容 USB v1.1
- 支持 USB 全速(12Mbps)通讯
- 双数据缓冲区，支持双路同时传送
- 极低的耗电量
- 支持电源休眠和恢复管理
- 支持远程唤醒
- 即插即用驱动程序可运行于 Windows98/Me/2000/XP
- 直接 USB 端口取电
- 特别适用于手提电脑

### UE-AA15NC-A USB Network Link(USB 双机网络线)

采用 USB Network Link 可以非常快速和容易的组成网络，通过 USB 接口可以取代以太网卡。它适用小型办公室、家庭办公室、移动用户、网络游戏等环境，通过它用户能共享硬盘文件、打印机、外围设备、和其它支持网络共享的设备。

- USB 主机到主机通讯
- 标准的 Windows 资源管理器用户界面
- 支持 USB 最大传送速率 12Mbps
- 通过 USB Hub 可组成超过 17 台 PC 的 USB 网络系统
- 支持 TCP/IP, NetBEUI, IPX/SPX 传输协议
- 完全的 NDIS 驱动支持
- 单条电缆即可解决网络连接问题
- 无需外接电源
- 支持即插即用，热拔插
- 支持电源管理
- 特别适用于小型办公和移动环境
- 完全兼容 USB v1.1

系统连接示意图

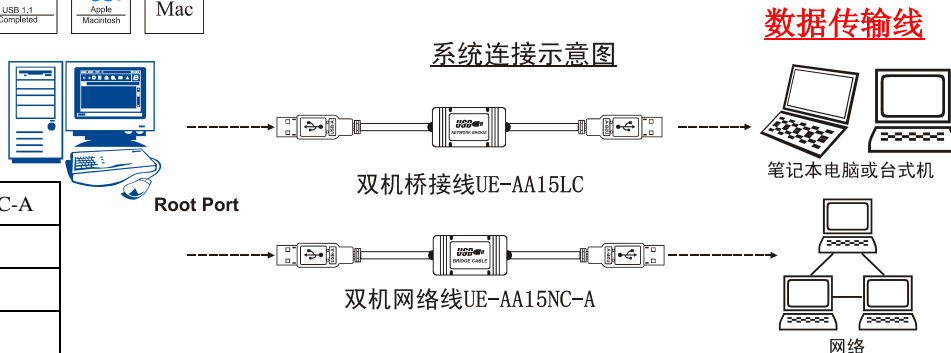

数据传输线



UE-AA15LC-A  
(USB 双机桥接线)

USB<<<数据传输>>>USB



UE-AA15NC-A  
(USB 双机网络线)

USB<<<数据传输>>>USB



## WanTeng Electronic Technology Co.,Ltd

网站: <http://www.wantong3w.com>  
 Email: [sales@wantong3w.com](mailto:sales@wantong3w.com)  
 地址: 浙江省温州市高新技术产业园区创业园 B 幢 2 楼  
 TEL: 0577-86581061, 86581062 FAX: 0577-86581063

Copyright 2007, WanTeng Electronic Technology Co.,Ltd  
 Printed in China 07/2007

Manual Part No.



GS3250-070402



RECYCLABLE  
 Made in China



各种连接器件综合对照表

	串行口连线	并行口连线	普通网卡 (RJ45)	笔记本网卡	USB 双机桥接线	USB 双机网络线
最高速率	115.2K	1.2M	10/100M	10/100M	12M	12M
传输可靠性	差	一般	好	好	好	好
体积	小	小	较大	小	小	小
通用性	好	好	一般*	差**	好	好
是否占用插槽	不	不	占用 PCI 或 ISA	占用 PCMCIA	不	不
是否占用中断	不	不	占用	占用	不	不
是否需要其他硬件支持	No	No	需要***	需要***	No	No
电源管理	No	No	No	Yes	Yes	Yes
文件传输	Yes	Yes	Yes	Yes	Yes	Yes
设备共享 (打印机等)	不共享	不共享	共享	共享	不共享	共享
能否组成网络	不能	不能	能	能	不能	能
支持网络协议	不支持	不支持	支持	支持	不支持	支持
支持 Internet	不支持	不支持	支持	支持	不支持	支持
支持网络游戏	不支持	不支持	支持	支持	不支持	支持
支持即插即用	不支持	不支持	部分支持	支持	支持	支持
支持热拔插	不支持	不支持	不支持	支持	支持	支持
价格	低	低	中	高	中	中

\* 只能用于有相应插槽的台式机

\*\* 只能用于有 PCMCIA 槽的笔记本电脑

\*\*\* 需要 Hub 或交换机, 且与之相连  
电脑也需要相应的网络设备

